



Large Compression Latches

Features

- ▶ includes:
 - ▶ (1) body lock washer
 - ▶ (1) body mounting nut
 - ▶ (1) cam
 - ▶ (2) cam lock washers
 - ▶ (2) cam mounting nuts
- ▶ die cast zinc
- ▶ finish: black powder coated
- ▶ grip range shown is in locked position
- ▶ achieves NEMA type 4, 12 and IP65 when used with **X174-01** gasket (sold separately)
- ▶ 1.37 [34.9] O.D. x .13 [3.2] thick steel zinc plated spacer (sold separately as part no. **KH45**)



Grip Range		Part Number					
		Non-Locking T	Thumb Turn	Locking T	8mm Recessed Hex	3mm Double Bitted	7mm Triangle
Min.	Max.						
.45 [11.4]	1.07 [27.2]	4-10BK15	4-11BK15	4-12BK15	4-13BK15	4-14BK15	4-15BK15
1.00 [25.4]	1.62 [41.1]	4-10BK10	4-11BK10	4-12BK10	4-13BK10	4-14BK10	4-15BK10
1.53 [38.9]	2.15 [54.6]	4-10BK05	4-11BK05	4-12BK05	4-13BK05	4-14BK05	4-15BK05
2.07 [52.6]	2.69 [68.3]	4-10BK10	4-11BK10	4-12BK10	4-13BK10	4-14BK10	4-15BK10
2.61 [66.3]	3.00 [76.2]	4-10BK15	4-11BK15	4-12BK15	4-13BK15	4-14BK15	4-15BK15


▶ **NOTE:** non-locking T latches are also available in 316SS material with hand polished finish: **4-10SSTP05, 4-10SSTP10, 4-10SSTP15**

Grip Range		Part Number					
		7mm Square	Slotted	Recessed Tubular	8mm Square	Bellcore 216	Bellcore Electronics
Min.	Max.						
.45 [11.4]	1.07 [27.2]	4-16BK15	4-17BK15	4-18BK15	4-19BK15	4-21BK15	4-22BK15
1.00 [25.4]	1.62 [41.1]	4-16BK10	4-17BK10	4-18BK10	4-19BK10	4-21BK10	4-22BK10
1.53 [38.9]	2.15 [54.6]	4-16BK05	4-17BK05	4-18BK05	4-19BK05	4-21BK05	4-22BK05
2.07 [52.6]	2.69 [68.3]	4-16BK10	4-17BK10	4-18BK10	4-19BK10	4-21BK10	4-22BK10
2.61 [66.3]	3.00 [76.2]	4-16BK15	4-17BK15	4-18BK15	4-19BK15	4-21BK15	4-22BK15

▶ **NOTE:** gasket available separately (part no. **X174-01**)

Key For Recessed Plugs

Part Number	Key Style
4-14K	3mm double bitted
4-15K	7mm triangle
4-16K	7mm square
4-18K	recessed tubular
4-19K	8mm square
4-21K	Bellcore 216
4-22K	Bellcore electronics

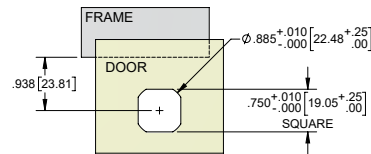

MOUNTING DIMENSIONS

