

Continuous Hinges with Holes

Stainless Steel Continuous Hinges with Holes




302/304SS - Hand Polished - Drilled Countersunk Holes

Part Number	Material Thickness	Open Width	Pin Diameter	Knuckle Length	Hole Size	Length	Notes
MSS410	.040	1.06	.091	.50	Ø.181 hole countersunk for a #5 F.H.S.	72.00	<ul style="list-style-type: none"> ▶ 302/304SS leaves and pin ▶ pin securely staked in place ▶ deeply drilled countersunk holes on 2.00" centers ▶ top side and knuckle polished to a high luster ▶ packaged to prevent scratching in transit
MSS412	.040	1.25	.091	.50			
MSS415	.040	1.50	.091	.50	Ø.211 hole countersunk for a #6 F.H.S.		
MSS420	.040	2.00	.091	.50	Ø.181 hole countersunk for a #6 F.H.S.		
MSS615	.060	1.50	.120	.50			
MSS620	.060	2.00	.120	.50			
MSS630	.060	3.00	.120	.50			

302/304SS - Mill - Drilled Countersunk Holes

Part Number	Material Thickness	Open Width	Pin Diameter	Knuckle Length	Hole Size	Length	Notes
MSS410M	.040	1.06	.091	.50	Ø.181 hole countersunk for a #5 F.H.S.	72.00	<ul style="list-style-type: none"> ▶ all details as above, except these hinges are mill finish (not polished or degreased).
MSS412M	.040	1.25	.091	.50			
MSS415M	.040	1.50	.091	.50	Ø.211 hole countersunk for a #6 F.H.S.		
MSS420M	.040	2.00	.091	.50	Ø.181 hole countersunk for a #6 F.H.S.		
MSS615M	.060	1.50	.120	.50			
MSS620M	.060	2.00	.120	.50			
MSS630M	.060	3.00	.120	.50			

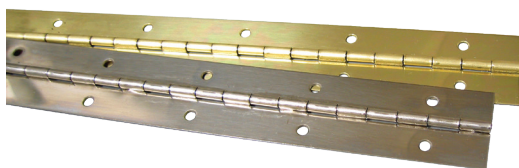

Premium Finish Steel Continuous Hinges with Countersunk Holes

Part Numbers				Screw Size	Finish
Open Widths					
1.06"	1.25"	1.50"	2.00"		
NPSL41094	NPSL41294	NPSL41594	NPSL42094	#4	NICKEL PREMIUM GRADE
	NPSL41295	NPSL41595	NPSL42095	#5	<ul style="list-style-type: none"> ▶ top side high luster ▶ bottom side dull
		NPSL41596	NPSL42096	#6	<ul style="list-style-type: none"> ▶ both sides lacquered
BPSL41094	BPSL41294	BPSL41594	BPSL42094	#4	BRASS, PREMIUM GRADE, BRIGHT
	BPSL41295	BPSL41595 ‡	BPSL42095	#5	<ul style="list-style-type: none"> ▶ top side high luster ▶ bottom side satin
		BPSL41596 ‡	BPSL42096 ‡	#6	<ul style="list-style-type: none"> ▶ both sides lacquered

- ▶ leaf thickness .040", pre-plated cold rolled steel
- ▶ pin diameter .091", galvanized pin staked in place
- ▶ knuckle length .50"

- ▶ stock lengths shown are 72.00" long
- ▶ coined countersunk holes on 2.00" centers for flat head screws
- ‡ these hinges are non-stock