




Small Black L-Handles with 3-Point Cam

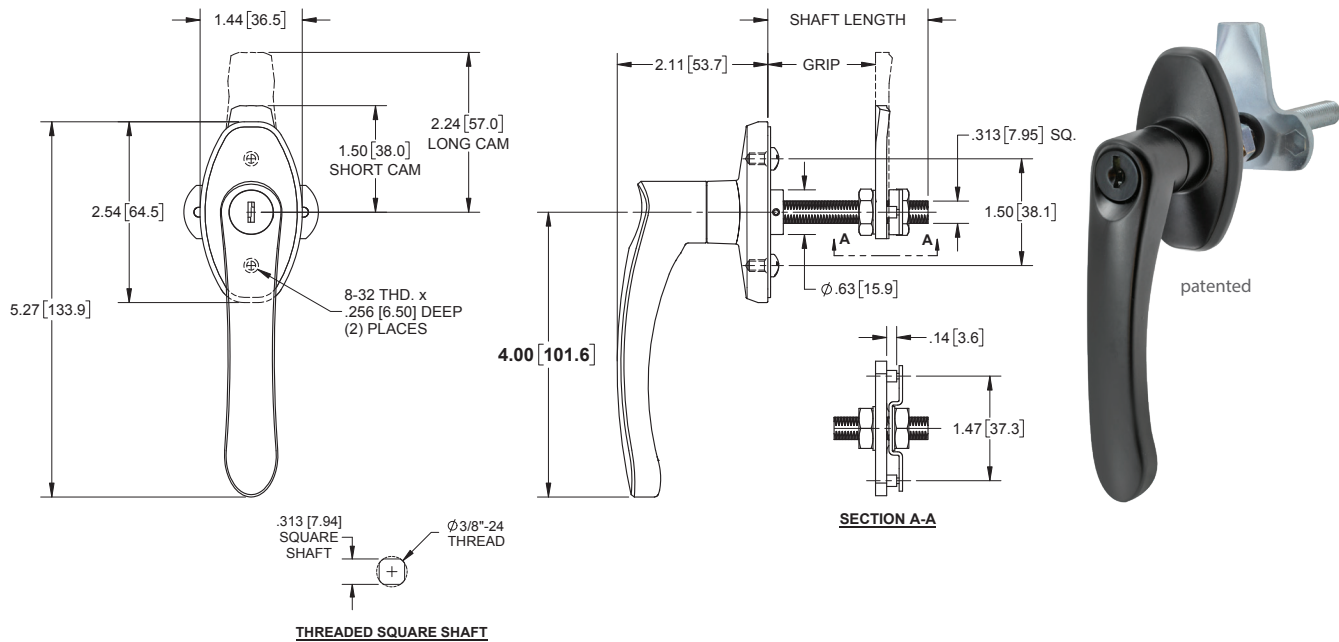

Part Number	Cam Type	Shaft Length	Grip	Rotation	Key Code
<b>35BK-01</b>	short	1.25 [31.8]	.63 [16.0] - .75 [19.1]		
<b>35BK-01L</b>	long				
<b>35BK-02</b>	short	1.75 [44.5]	.63 [16.0] - 1.25 [31.8]	90° CW	non-locking
<b>35BK-02L</b>	long				
<b>35BK-03</b>	short	2.25 [57.2]	.63 [16.0] - 1.75 [44.5]		
<b>35BK-03L</b>	long				
<b>36BK-01</b>	short	1.25 [31.8]	.63 [16.0] - .75 [19.1]		
<b>36BK-01L</b>	long				
<b>36BK-02</b>	short	1.75 [44.5]	.63 [16.0] - 1.25 [31.8]	90° CW	CH751
<b>36BK-02L</b>	long				
<b>36BK-03</b>	short	2.25 [57.2]	.63 [16.0] - 1.75 [44.5]		
<b>36BK-03L</b>	long				
<b>35BK-04</b>	short	1.25 [31.8]	.63 [16.0] - .75 [19.1]		
<b>35BK-04L</b>	long				
<b>35BK-05</b>	short	1.74 [44.5]	.63 [16.0] - 1.25 [31.8]	90° CC	non-locking
<b>35BK-05L</b>	long				
<b>35BK-06</b>	short	2.25 [57.2]	.63 [16.0] - 1.75 [44.5]		
<b>35BK-06L</b>	long				
<b>36BK-04</b>	short	1.25 [31.8]	.63 [16.0] - .75 [19.1]		
<b>36BK-04L</b>	long				
<b>36BK-05</b>	short	1.75 [44.5]	.63 [16.0] - 1.25 [31.8]	90° CC	CH751
<b>36BK-05L</b>	long				
<b>36BK-06</b>	short	2.25 [57.2]	.63 [16.0] - 1.75 [44.5]		
<b>36BK-06L</b>	long				

- ▶ material: die cast zinc
- ▶ meets ADA requirements
- ▶ locking handles include (2) ringed keys
- ▶ handles are blind-mount and include (2) 8-32 x .25 [6.4] long mounting screws
- ▶ all handles include 3/8"-24 keps nuts for the threaded shaft
- ▶ may be used with part number **723** rod, pg. 67